

**Important: Read all instructions prior to installation.**

## Selectable CCT LED Downlight



### Safety and Notes


- **Dangerous: High Voltage.** Product should be installed and serviced by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Do not use if cable, light, or junction box are damaged.
- Avoid looking directly into lamp when illuminated.
- Connect only to indicated voltage and in an appropriate environment to avoid potential damage or personal injury.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

### Specifications

Environmental Specifications	
Operating Temperature	-4°–104° F (-20°–40° C)
IP Rating	IP20


Check product label for specific electrical specifications related to installation. Improper installation will void warranty.

### Wiring Diagram

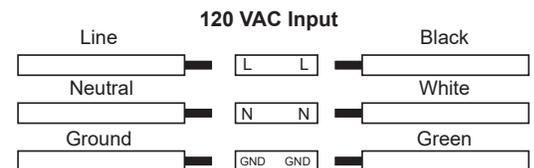

### Installation

1. Turn supply power to circuit off.
2. Measure and cut hole according to model.
3. Select desired CCT using the switch on the side of the junction box.
4. Remove conduit knockout and install cable clamp.
5. Securely mount junction box. Screw cutout in the bottom of box.
6. Make electrical connections.
7. Mount light pulling spring legs secure light and connect quick-connect plug.
8. Apply supply power.

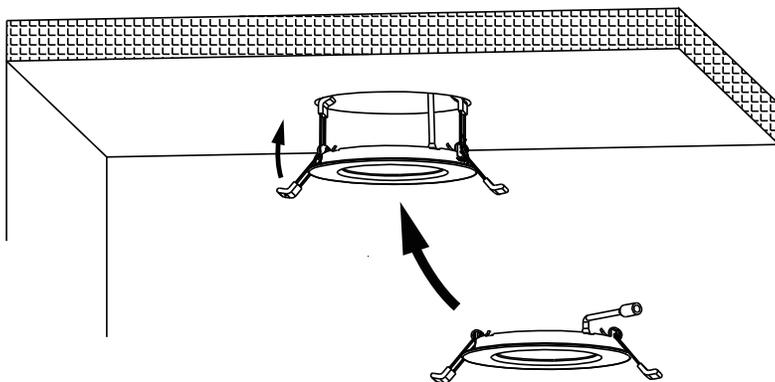

Model	Cutout Size
DLC6S-12W205se	5.78" [146.8mm]

### CCT Adjustment

Prior to installing light, CCT can be selected using the built-in switch in junction box. Select between 2700K / 3000K / 3500K / 4000K / 5000K.

