superbrightleds.com

User Manual

DLG6D Series

Important: Read all instructions prior to installation.

LED Gimbal Can Down Light

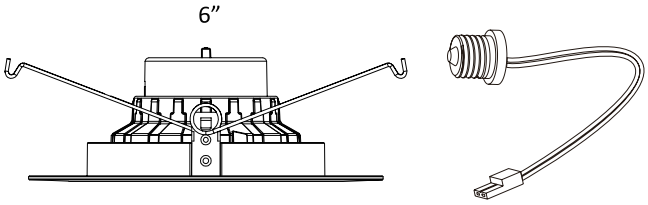

Specifications

Model	DLG6D-K1-SW5A16
Size	6”
Voltage	120 VAC
Wattage	16 W
Beam Angle	100°
Operating Temperature	-4°–113° F (-20°–45° C)
Environmental Rating	Suitable for Damp Locations

Safety and Notes

- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into lamp when illuminated.
- Ensure all mounts are securely attached and will support weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.

Installation Instructions
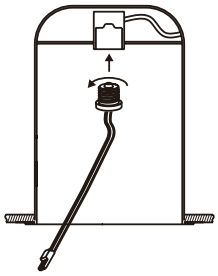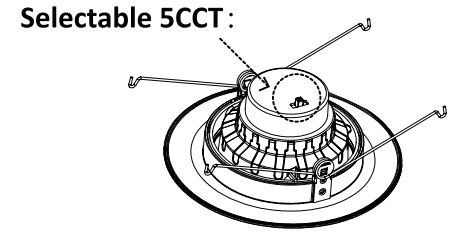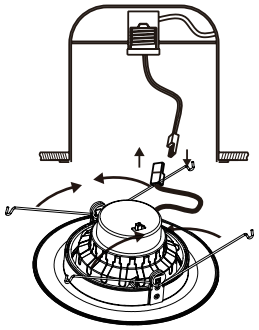
1. Remove supply power at the breaker.
2. Screw E26 socket adapter into the existing socket.
3. Select desired CCT using the switch on the back of fixture.
4. Connect the socket adapter with orange quick-connector to the fixture.
5. Flip torsion springs and push fixture into can. Torsion springs will adjust to secure fixture in place.
6. Adjust gimbal as needed per application. Gimbal can be rotated 360° and angled to 60°.
7. Reapply supply power.