
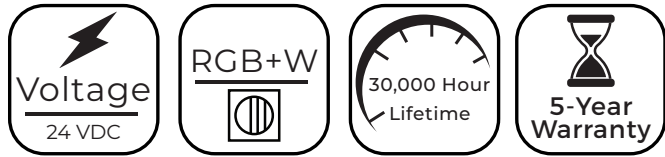


**2NFLS Series**

RGBW LED Strip Light Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

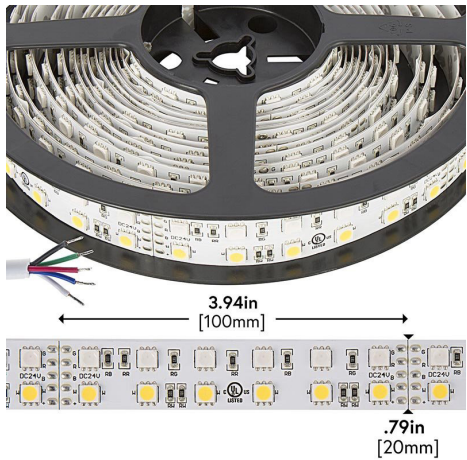

**Available Models<sup>1</sup>**

- 2NFLS-RGBNW600X3-24V

**Specifications**

Model	2NFLS-RGBNW600X3-24V
Operating Voltage	24 VDC
Power Consumption	137 W
Wattage Per Foot	8.4 W/ft (27.6 W/m)
Current Draw	5.7 A
Current Draw Per Foot	348 mA
Brightness	530 lm/ft
Color/CCT	RGB+NW (4000K)
Beam Angle	120°
CRI	80+
Dimmable	Yes
Light Length	16.4 ft (5 m)
Max Run (Class 2)	Up to 16.4 ft (5 m)
LED Density	36 LEDs/ft
Minimum Cut Length	100 mm (3.9 in.)
LEDs per Segment	12
IP Rating	IP22, non-weatherproof
Environmental Rating	Suitable for damp locations
Rated Life (L70)	30,000 hours
Ambient Operating Temperature	-13-140° F (-25-60° C)

**Features**

- 24 VDC input
- 80+ CRI
- LED lifetime of 30,000 hours (L70)
- 20 mm strip width
- 3M adhesive backing
- IP22, non-weatherproof
- Operating temperature: -13-140° F (-25-60° C)

**Application**

Some common applications include sign lighting, bias lighting, cove lighting, task lighting, backlighting, accent lighting, and under cabinet lighting.

**Certifications and Compliances**

- UL Listed - UL 2108 (IFDR)
- Suitable for damp locations



**Warranty**

- Five (5) Year Warranty



<sup>1</sup>Contact customer service if interested in options other than those listed.

## 2NFLS Series

RGBW LED Strip Light Specifications

### Dimensional Drawings

