

Important: Read all instructions prior to installation.

Round LED Flush Mount Downlight

Safety and Notes

READ AND FOLLOW BELOW SAFETY INSTRUCTIONS

GENERAL: All electrical connections must be in accordance with local and National Electrical Code (N.E.C.) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.


- Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation.
- To prevent wiring damage or abrasion do not expose wiring to edges of sheet metal or other sharp objects.
- Suitable for wet locations.
- Suitable for Type non-IC.
- Use only in open luminaires.
- This device is not intended for use with emergency exit.
- This fixture is dimmable. Dimming range is 10%–100%. Please refer to below compatible dimmer list.

-LEVITON: 6672, RNL06, IPL06, DSL06, 6674, VPI06-1LZ

-LUTRON: GT-600P, DVCL-153P, TGCL-153PH-LA, MSCL-OP153M, SLV-600P-AL, PD-6WCL, DV-600PR-WH, MACL-153M/MA-R, SCL-153PH-WH, CTCL-153PDH-WH, TG-600PR-WH, S-600PR-WH



WARNING: RISK OF FIRE OR ELECTRIC SHOCK
DISCONNECT MAIN POWER AT FUSE OR CIRCUIT BREAKER
BEFORE INSTALLING OR SERVICES THE FIXTURE

Wiring Diagram

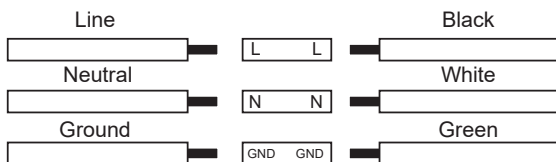

Installation Instructions

1. Turn off supply power.
2. Attach mounting bracket into junction box.
3. Connect all wiring.
4. Push light on to mounting bracket until it locks, securing in place.

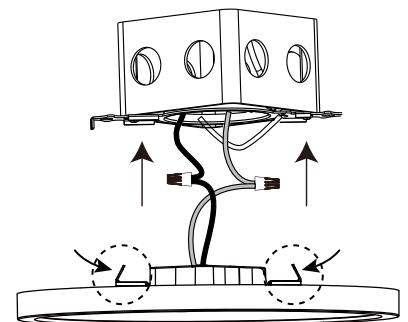


Specifications


Model	LPRCCT-SW5A-xWx
Operating Temperature	-4°–104° F (-20°–40° C)
Dimming	TRIAC

Trim Ring Installation

Place the trim ring over the light, then fold the tabs around the back of the light to hold the trim ring in place.



CCT Selection



5 IN 1

- ☒ 2700K
- ☒ 3000K
- ☒ 3500K
- ☒ 4000K
- ☒ 5000K