


# MWP3 Series

Mini LED Wall Pack Specifications

Project \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_



## Description

MWP3 series mini LED wall packs are a reliable and compact lighting solution for commercial and multi-residential locations. Built-in CCT and wattage selection switches allow these to match virtually any location or application. Architectural bronze powder-coated housing is suitable for wet locations and outdoor applications. All MWP3s have a photocell included for dusk to dawn operation, which can easily be bypassed as needed.

## Construction

- Powder-coated bronze, die-cast aluminum housing
- Impact-resistant, prismatic polycarbonate lens

## Electrical

- All models are compatible with 120–277 VAC
- 0–10 V dimmable
- Photocell included for dusk-to-dawn operation—turns light on below 50 lx, then turns light off when back above 120 lx

## Photometrics

- 100° beam angle
- 125 lm/W
- 80+ CRI

## Available Models<sup>1</sup>

- ☐ MWP3-SW3B30-BRPM

## Part Number Breakdown

Example: MWP3-SW3B30-BRPM

| Family | CCT and Wattage Option | CCT                        | Wattage                 | Finish         | Control Option    |
|--------|------------------------|----------------------------|-------------------------|----------------|-------------------|
| MWP3   | SW<br>[selectable]     | 3B (3000K / 4000K / 5000K) | 30 [30 W / 20 W / 15 W] | BR<br>[bronze] | PM<br>[Photocell] |

## Application

Easily replaces inefficient metal-halide fixtures such as those found in warehouses, parking lots and garages, gas stations, and other commercial and industrial spaces. These are also a great solution for entryways and other areas where good lighting is essential for security.

## Warranty

Five (5) Year Warranty

## Certifications and Compliances

Lights are Certified by UL in compliance with UL 1598 (IFAM). They are also DesignLights Consortium listed as DLC 5.1 Premium



T 866.811.5550

F 314.972.6202

email: commercial-sales@superbrightleds.com

www.superbrightleds.com/cat/industrial-led-lighting/

<sup>1</sup>Contact customer service if interested in options other than those listed.

Rev V1 Date: 09/22/2023


Specifications are subject to change without notice.

Printed in the U.S.A.

## MWP3 Series

### Mini LED Wall Pack Specifications

#### Dimensions

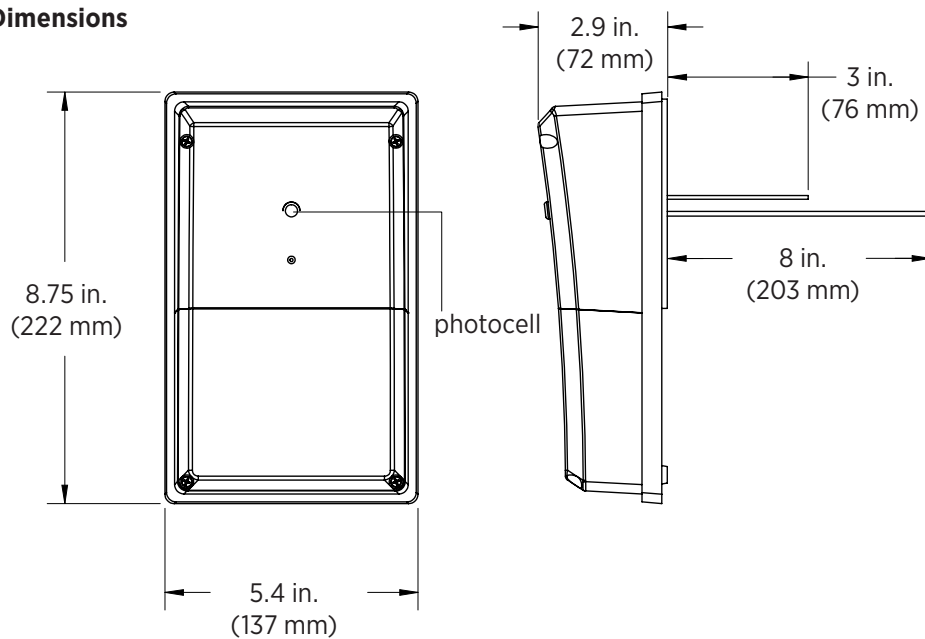

#### Specifications

| Model                         | MWP3-SW3B30-BRPM  |
|-------------------------------|---|
| Intensity <sup>2</sup>        | 3,750 / 2,500 / 1,875 lm  |
| Operating Voltage             | 120-277 VAC   |
| Power Consumption             | selectable (30 W / 20 W / 15 W)   |
| Current Draw                  | 250 / 167 / 125 mA @ 120 VAC<br>108 / 72 / 54 mA @ 277 VAC  |
| Efficacy                      | 125 lm/W  |
| Color Temperature             | selectable (3000K / 4000K / 5000K)  |
| Beam Angle                    | 100°  |
| BUG Rating                    | B1-U3-G1  |
| CRI                           | 80+   |
| Dimming                       | 0-10V   |
| Photocell Operation           | light turns on when the ambient light level falls below 50 lx and will turn off when the ambient light level exceeds 120 lx |
| IP Rating                     | IP65  |
| Ambient Operating Temperature | -40°-122° F (-40°-50° C)  |
| Rated Life (L70)              | 50,000 hours  |

<sup>2</sup>Intensity varies by CCT, with cooler temperatures having higher lumen values.

