(HI) H

SLLP-SW3B4-40W

electabl

CCT

SLLP Series

LED Pull Chain Shop Light Specifications

Project_____

Date Type

Available Models¹

- □ SLLP-SW3B4-40WR
- SLLP-SW3B4-40W

Part Number Breakdown



Series	сст	Size	Wattage	Style		
SLLP	SW3B [selectable, 3000K / 4000K / 5000K]	4 [4 ft.]	40W [40 W]	R [wrap around] blank [standard]		

Overview

'oltage

120 VAC

CRI

80+

The 4ft Linkable 40W LED Shop Light with Pull Chain has selectable CCT to offer the choice of 3000K, 4000K, or 5000K light. These selections can be made on the slide switch near the pull chain. Easily link multiple fixtures together with the included NEMA 1-15P plug. The cord is over 4 feet long. This fixture is a bright, energy-efficient alternative to traditional tube or strip light fixtures. It emits a wide 113° beam angle for task lighting in garages and workshops. It can be surface-mounted or suspensionmounted with the supplied hanging kit.

Suitable

for Damp

ocations

Features

- Selectable CCT: 3000K, 4000K, and 5000K
- Easily daisy-chain up to four fixtures with the plug-and-play design
- Equivalent to fixtures using two 4' 32W T8 tubes
- · Includes surface and suspension mounting hardware

Product Details

- · Coated steel or polycarbonate housing
- Frosted polycarbonate lenses
- Wide 113° beam angle
- Max run: 5 fixtures (SLLP-SW3B4-40WR); 4 fixtures (SLLP-SW3B4-40)
- NEMA 1-15P connection input
- Rated suitable for damp locations
- 120 VAC

Warranty

5-year warranty



T 314.743.3067 F 314.972.6202 email: commercial-sales@superbrightleds.com www.superbrightleds.com/cat/industrial-led-lighting/

Applications

- Basements
- Daisy Chain Lighting
- Garages
- Workbenches
- Workshops

Certifications and Compliances

• ETL Listed - UL 153





¹Contact customer service if interested in other options.


Rev V2.0 Date: 06/13/2024 Specifications are subject to change without notice. Printed in the U.S.A.

super brightleds.com

SLLP Series

LED Pull Chain Shop Light Specifications

Dimensional Drawings

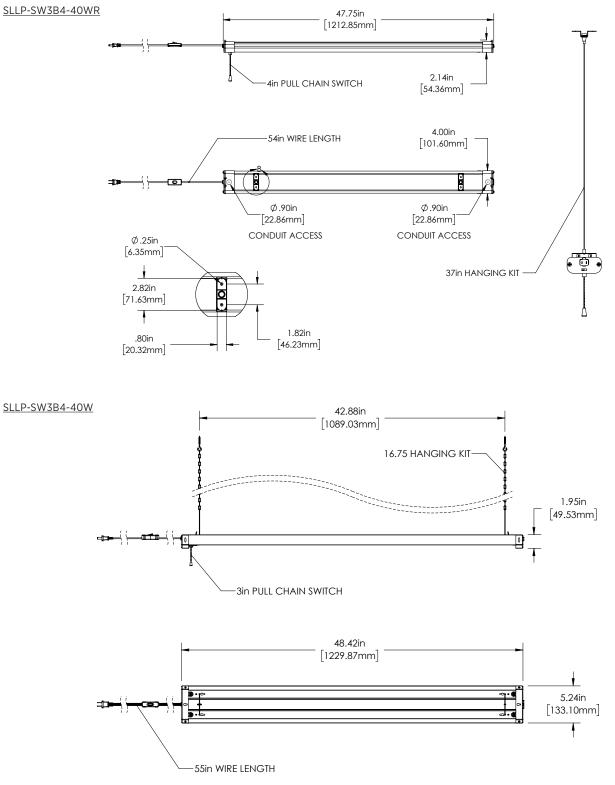



T 314.743.3067 F 314.972.6202 email: commercial-sales@superbrightleds.com www.superbrightleds.com/cat/industrial-led-lighting/

super brightleds.com

SLLP Series

LED Pull Chain Shop Light Specifications

Specifications

Model		SLLP-SW3B4-40WR	SLLP-SW3B4-40	
Lumens		4,800 lm	4,000 lm	
Efficacy		120 lm/W	100 lm/W	
Linkable Connections (max.)		5 pcs @ 200W	4 pcs @ 160W	
Power Consumption		40 W		
Operating Voltage		120 VAC		
Current Draw	120 VAC	370 mA		
Power Factor		>0.9		
Color Temperature(s)		Selectable (3000K / 4000K / 5000K)		
Beam Angle		113°		
CRI		80+		
Dimming		None		
Environmental Rating		Suitable for damp locations		
Rated Life (L70)		30,000 hours		
Ambient Operating Temperature		-40°-113° F (-40°-45° C)		
Housing Material		Steel	Polycarbonate	
Product Weight		3.5 lb (1.6 kg)	2.9 lb (1.3 kg)	

