

Important: Read all instructions prior to installation.

TLFD-V1 Series

Selectable CCT and Wattage LED Troffer Light



TLFD-V1-SW3C22-840

Safety and Notes

- Product should be installed by a certified electrician in accordance with applicable national, state, and local building and electrical codes.
- To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures.
- Avoid looking directly into the lamp when illuminated.
- Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support the fixture may result in damage or injury, for which the manufacturer does not assume responsibility.


Specifications

Model	TLFD-V1-SW3C22-840	TLFD-V1-SW3C24-872
Operating Temperature	-4°–113° F (-20°–45° C)	
Environmental Rating	IP20	
Dimming	0–10 V	

Check product label for specific electrical specifications related to installation.
Improper installation will void warranty.

Wiring Diagram

Note: Cap any unused wires during installation process.

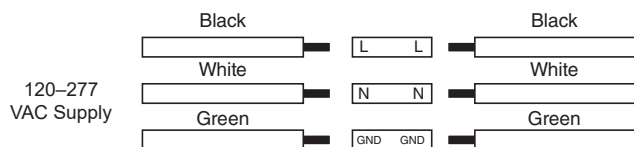

Installation Instructions

1. Make electrical connections in attached junction box.
2. Select desired CCT and wattage using the two slide switches on the side of the driver box.
3. With safety tabs bent out to be vertical, lay fixture into T-grid.
4. Bend safety tabs out to a 90 degree angle.

Note: Tabs should be adjusted as needed to allow reinstallation of adjacent ceiling tiles. The safety tabs are to prevent the troffer from falling if the grid shifts due to an earthquake, etc. and are not meant to hang the light in the grid.

